

# Hydratron Pressure Pump 863Bar in Frame

Selection	Value
ID Number	
Ex Sone	1
Max Working pressure	863 bar
Max Gross weight	120 kg
Max Flow	17 l / min
Pump Type	DADH66



## Hydratron Type DHDA66

PRESSURE PUMP IN HH FOR NORSOK REQUIREMENTS WITH DROP TRAY AND GROUNDING BOSS

In our rental fleet you will find a variety of pumps and specifications, all in accordance with market requirements, including ATEX and Norsok specifications.

As an example, the Hydratron Double Airhead Double Acting Series, Air Powered Fluid Pump, is a reciprocating positive displacement pump with a directly connected, integrated linear reciprocating air motor designed to generate high pressure fluid flow.


The increase in pressure is made possible by the area ratio between the two larger diameter air drive pistons which are directly connected to two smaller diameter liquid pistons. By using our various material and sealing options, they are suitable for pumping a wide range of liquids, including water, oil, water / g



English



Delivered in a robust frame and drip tray made of stainless steel, all according to your needs - Ask us for a price

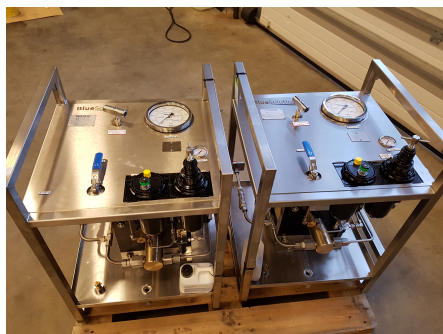

**Additional information:**

ATEX NORSOK SPECIFICATIONS



English

