

Hydratron Pressure Pump 863Bar

Selection	Value
ID number	
Ex Sone	1
Max Working pressure	863 bar
Max Gross weight	120 kg
Max Flow	17 l / min
Pump Type	DADH66
Type	
Volume	



Hydratron Type DHDA66


The Hydratron Double Airhead Double Acting Series, Air-powered fluid pump, is a dual-acting, positive displacement pump with a directly coupled, integrated linear reciprocating air motor designed to generate high-pressure fluid flow.

The increase in pressure is made possible by the area ratio between the two larger diameter air drive pistons which are directly connected to two smaller diameter liquid pistons. By using our various material and sealing options, they are suitable for pumping a wide range of liquids, including water, oil, water / glycol and many other chemical liquids.

Pump can be delivered in ATEX version, as integrated part of test system, or in our own design framework manufactured in Stainless Steel with drip tray.

Satisfies Norsok specifications.

Ask us for price

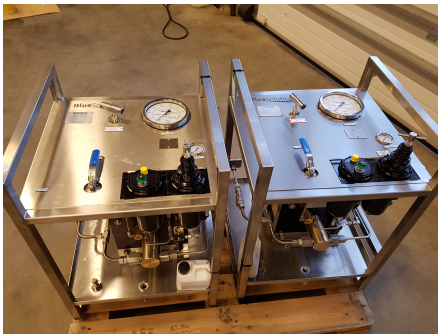

(PRESSURE PUMP IN ACCORDANCE WITH NORSOK REQUIREMENTS WITH DRYING PIPES AND GROUNDING BOSS.

All according to market requirements, this also includes ATEX)

Additional information:

ATEX NORSOK SPECIFICATIONS



English

